

**PFX
SERIES**

PFX.V23.2




TRIMECCANICA

PROGETTAZIONE - COSTRUZIONE - ASSISTENZA

PFX

DITCH CLEANING BUCKET




Made in Italy



FOR MINI, MIDI, AND EXCAVATORS

Ditch and channels cleaning bucket "PFX". The ideal choice for all operations as cleaning, restoration and construction of slopes, drainage ditches maintenance, environmental reclamation works and roadside maintenance. Made of heavy-duty steel S355 and abrasion resistant steel 250 HB, 400 HB and 450 HB. The wide range of models allows the perfect match for every excavator from 1,2 to 38 ton, providing the best performance for each specific class and application.

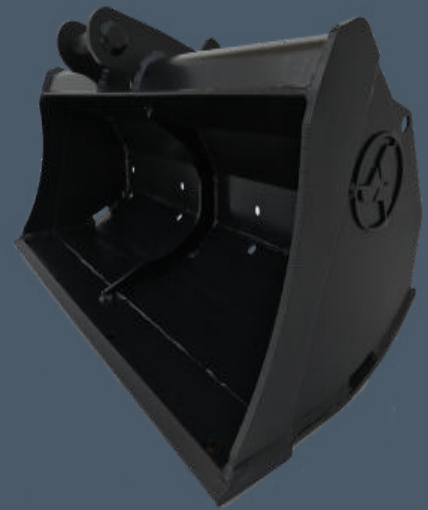



Holes for
water spill



Reinforced
round by
default



Additional
reversible
bolt-on
blade

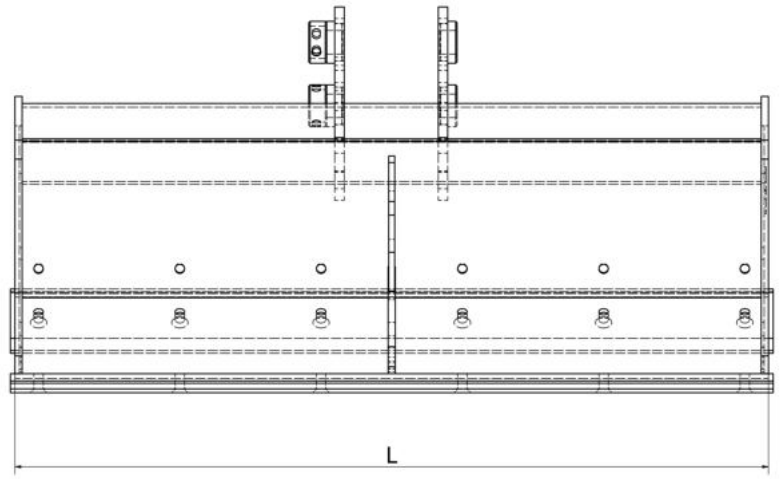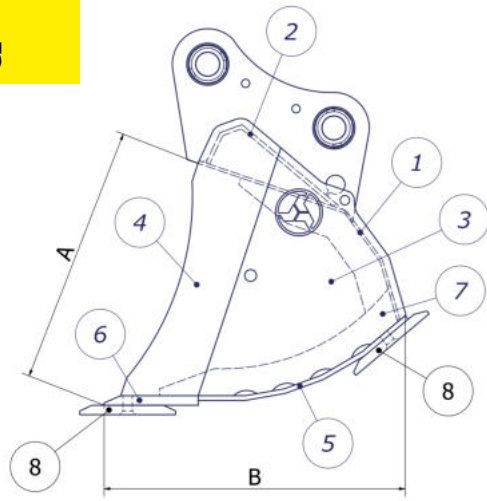

Technical features

Class	Operating weight (Q)	Thickness (mm)							
		1	2	3	4	5	6	7	8
T20-T22	12-18	S355	S355	S355	S355	S355	HB250	S355	HB400
T22-T30	18-40	4	6	4	10	6	110X16	6	152X16
T38-T45	40-60	5	8	5	12	6	150X16	12	152X16
T46-T48	75-120	5	8	5	15	8	150X20	15	152X20
T55-T58	120-190	6	8	6	15	10	200X20	15	203X20
T63	190-210	8	10	8	20	12	250X25	20	254X25
T64-T68	210-300	10	10	10	25	15	250X30	25	254X25
T70	300-380	10	15	10	30	15	300X30	30	305X32
		12	20	12	30	15	300X35	30	305X32

Dimensions (mm)

Class	A	B	L
T20-T22	350	400	800/1200
T22-T30	400	450	1000/1400
T38-T45	450	550	1200/1600
T46-T48	550	650	1200/1800
T55-T58	650	750	1400/2000
T63	750	850	1800/2200
T64-T68	850	950	2000/2500
T70	950	1010	2000/2500
-	-	-	-
-	-	-	-

Blade / Under-blade LM (8)

Classe	T20 - T30	T38	T45 - T48	T53 - T58	T63	T64 - T70
800	4F.152016D	-	-	-	-	-
1000	4F.152016D	-	-	-	-	-
1200	4F.152016D	4F.152020D	4F.203020D	-	-	-
1400	-	4F.152020D	4F.203020D	4F.254025D	-	-
1500	-	6F.152020D	-	-	-	-
1600	-	6F.152020D	6F.203020D	6F.254025D	-	-
1800	-	-	6F.203020D	6F.254025D	6F.254025D	-
2000	-	-	-	8F.254025D	8F.254025D	8F.305032D
2200	-	-	-	-	10F.254025D	-
2500	-	-	-	-	-	10F.305032D

Optional:
 • Bolted reversible under-blade
 • Extra-hard cast steel blade

• Different sizes available on request. Trimeccanica company reserves the right to change, modify or improve the characteristics above at any time and without any prior notice.